



VIMMOST-A3G

VIDEO IN MOTION

ALL AUDI 3G MMI

WITHOUT REAR CAMERA

With or without TV Tuner



LOCATION & REMOVAL

All connections are made at the CD Changer or DVD player Unit in the front of the vehicle




All units are removed with VW/AUDI radio removal tools. Removing the unit without the correct keys may cause damage and problems when re-fitting the unit.

INSTALLATION

Remove the optical cable from the unit, shown below **(shown in Red circles below)**

DVD PLAYER

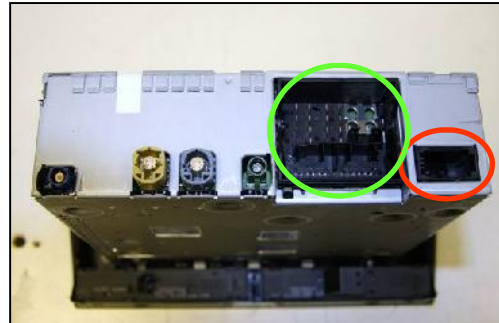

CD CHANGER



Next insert the supplied female optical cable into the factory harness optical plug.

Then insert one of the supplied male optical plugs into the CD Changer / DVD player.

Then insert the other male optical plug into the interface.

Using the power supply found in the factory power connectors **(shown in green circles above)**

Connect RED to 12v+ Permanent

Connect BLACK to 12v- Ground

OPERATING INSTRUCTIONS

When the interface is fitted the “video in motion” feature will be permanently active, there is no procedure to activate or de-activate the feature.