



VWAV1

A/V INPUT
VW / AUDI 4:3 NAVI+
Without TV Tuner



LOCATION & REMOVAL

Installation is made at the front unit.

Please note that the removal of units may differ between models

To remove Head Unit, most units require VW/AUDI "removal keys"



INSTALLATION

1. Plug in the supplied VWAV1 harness into the round socket on the head unit, see fig 001
2. Insert your Video lead into the socket on the interface see fig 002 (3)
3. Insert your Audio leads into the RED/WHITE cable sockets on the VWAV1 loom. see Fig 002 (4)
4. Connect the RED cable to a suitable 12v+ ignition/ accessory supply then connect the BLACK to a suitable 12v- ground,
5. The A/V source can be viewed via the TV or AUX button on the unit **provided the source is switched on.**
6. **NOTE; If the TV Tuner option is still not available, connect together the male and female bullets on the harness.**

OPERATING INSTRUCTIONS

The additional A/V source you have added can be viewed via the TV tuner option.

fig 001

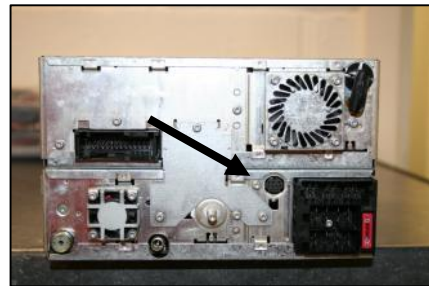


fig 002

