### **OPERATING INSTRUCTIONS**

VIDEO2 (Camera Input) is activated when the Blue cable is made live (adding a 12v+ supply) This input will override the additional source (VIDEO1) or the navigation map when activated.

If VIDEO 1 is required you will need to CUT the ORANGE cable on the harness and add in an external switch. When the orange cable is broken the VIDEO 1 source will be activated. When re-connected the factory Navigation will be restored.







## **NAV-INREN**

VIDEO INPUT

ALL Renault


With Separate Navigation



### **LOCATION & REMOVAL**

Nav-

- 1. Ensure the vehicle is equipped with igation
- 2. All the wires can be accessed at the connector on the back of the navigation.

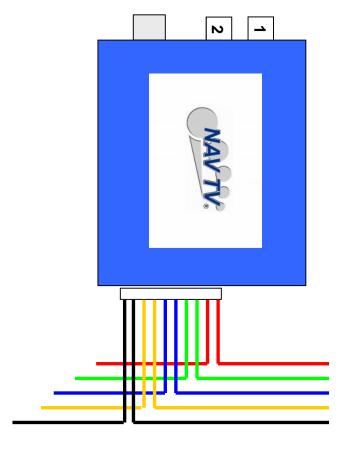

NAV	(Input)
SCREEN	(Out)

			L		Re	ar c	of pi	uç
16	15	14	13	12	11	10	9	
8	7	6	5	4	3	2	1	

### INSTALLATION

Locate the cable which connects the Navigation computer with the monitor. Within this cable you will find the cable colours given below You will then need to cut open the these cables and connect the input and output cables from the supplied harness as the diagram opposite shows.

The following colours can be found in the screen to navigation cable.

NAV-INREN		Car Harness
RED	to	RED
GREEN	to	GREEN
BLUE	to	YELLOW
YELLOW	to	BLACK
Shield	to	Shield/GND

Inside the interface the jumper should be at the shown position

# The RGB switch should be set to RGBS



### **INSTALLATION**

#### For Velsatis model

NAV-INREN		Car Harness
RED	to	RED
GREEN	to	GREEN
BLUE	to	ORANGE
YELLOW		NOT USED
Shield	to	shield/GND

Inside the interface the jumper should be at the shown position

# The RGB switch should be set to RGSB



#### Other connections

YELLOW to 12v+ ignition / acc

BLACK to 12v- Ground

BLUE to 12v+ to activate VIDEO 2

ORANGE Cut and add switch for VIDEO 1